


STEICO *multi tape P*

High performance tape with kraft paper

Sealing system for STEICO
insulation solutions

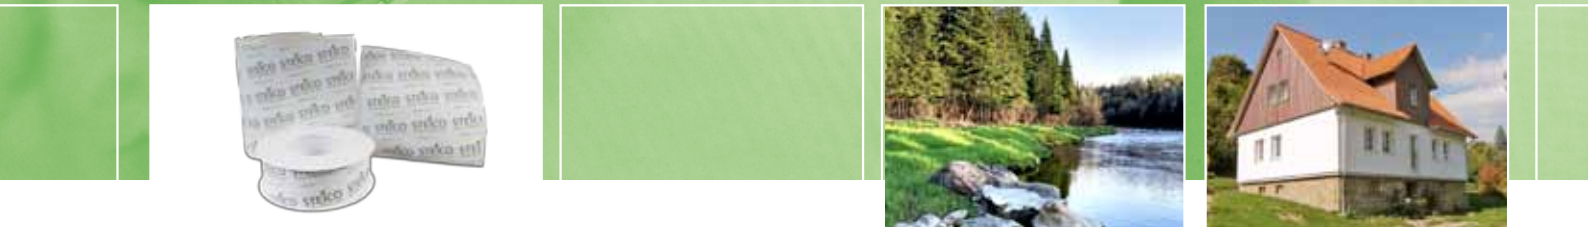

RECOMMENDED APPLICATION AREA

For butt joint and joint / adhesive bonding in the STEICO sheet and membrane system and on wood-based panels

Stickers serve for quickly sealing larger openings



- Solvent-free
- Temperature resistant between -40°C and $+100^{\circ}\text{C}$
- Can be torn by hand
- Robust kraft paper backing
- Stickers ideal for sealing injection holes

Additional information can be found at www.steico.com



| STORAGE/TRANSPORT

Store STEICOMulti tape P in a dry location at +5°C to +25°C

| INFORMATION

Protect STEICOMulti tape P against heat, cold and light

| DELIVERY FORMS FOR STEICOMulti tape P

Width	Roll length	Packaging unit
60 mm	40 m	10 rolls/cardboard box
180 x 180 mm	Roll with 222 stickers	4 rolls/cardboard box

| TECHNICAL CHARACTERISTICS OF STEICOMulti tape P

Adhesive	Acrylic dispersion, solvent-free
Adhesive backing	Kraft paper with PE protective coating
Colour	White
Thickness (without covering)	Approx. 0.3 mm
Temperature range	-40°C to +100°C
Processing temperature	+5°C

| PROCESSING STEICOMulti tape P IN THE STEICO SHEET AND MEMBRANE SYSTEM

- Substrates must be capable of bearing a load, dry and free from dust and grease
- Align the STEICOMulti tape P centrally, gradually remove the release liner and forcefully rub on the adhesive tape
- Adhere the STEICOMulti tape P without tension and creases. The substrate must be additionally mechanically secured if tensile forces arise
- Applying additional pressure by means of a press-on roller is recommended to improve the adhesion, in particular, on wood-based panels
- Adhesive bondings may not be located in stagnant water. Adhesive bondings are also not permitted in sauna and swimming pool construction