
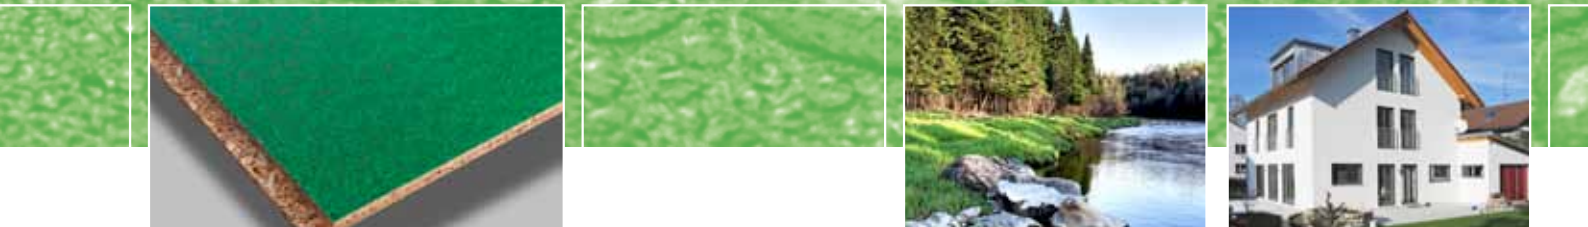


STEICO *weatherprotect*

P5 sealed surface flooring

Construction elements –
naturally made of timber

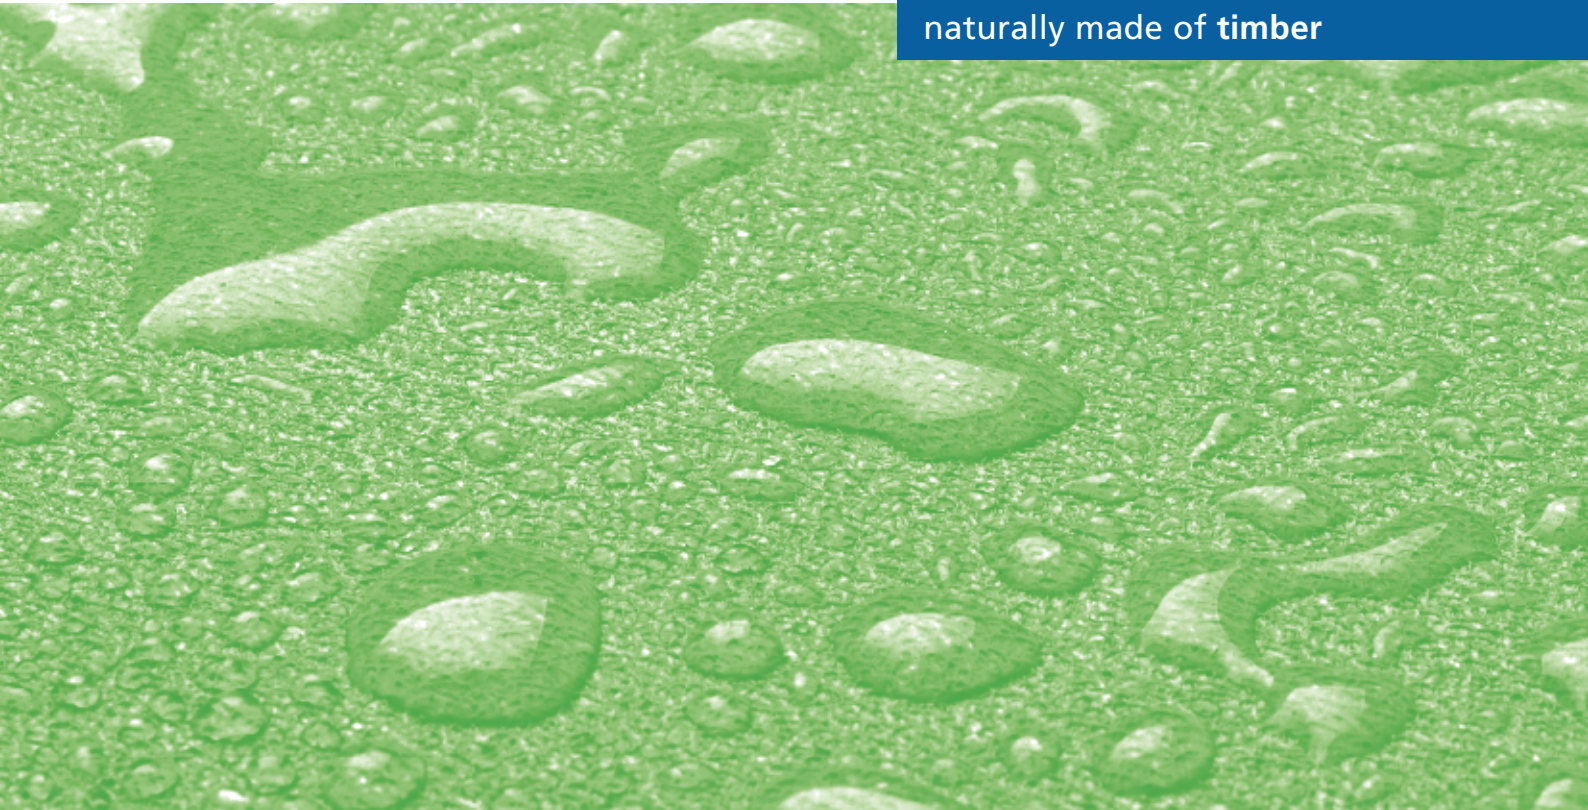


STEICO *weatherprotect* is a flooring solution designed for joisted and floating floor applications.

It combines high quality particle board with a **permanent, slip resistant, waterproof surface** and a fast fixing system.



- New high performance Acrylic surface coating
- Full 42 day exposed to weather protection
- Eco Friendly production
- FSC Certification
- Available in 18 or 22 mm
- Standard sizes 2400 mm x 600 mm
- Tongue and grooved four edges
- Baseboard conforms to EN 312 standards
- Produced in the UK to STEICO's exclusive specification

For more information please visit our website at www.steico.co.uk

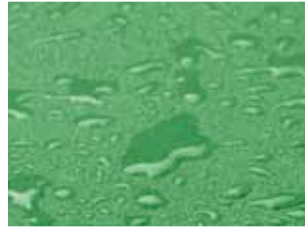

| STEICO *weatherprotect* BOARD SPECIFICATIONS

Thickness [mm]	Board Coverage [mm]	Weight [kg / m ²]	Pieces per pallet	Pallet Coverage [m ²]	Pallet weight [kg]
18	2400 × 600	12.3	86	123.84	ca. 1600
22	2400 × 600	15.0	70	100.80	ca. 1600

| STEICO *weatherprotect* PRODUCT DESCRIPTION

STEICO *weatherprotect* is a P5 T&G 4 chipboard flooring product. The product is coated with a specially developed permanent waterresistant Acrylic coating which is resistant to damage and which provides slip resistance until the floor is covered. Creating a superb, durable floor, Weatherprotect can be easily cleaned of site spoil at any time. Preventing moisture ingress, it helps to keep floors flat, while providing the ideal surface for the direct application of most floor tiles and finishes. Once the project is completed, the surface goes on to provide complete protection against leaks and spills for the life of the floor.

STEICO *weatherprotect* is the ultimate in surface finished particleboard flooring. It is designed to be fitted before the roof or any other weather

shielding. The level of weather protection provided by the surface, when laid in accordance with the instructions, is such that the surface can remain exposed to the weather for up to 42 days without detriment to the underlying chipboard.

The level of weather protection saves both time and money removing the need to fit, remove and dispose of expensive secondary, surface protecting, surface sheets.

If fitting in an exposed area, fixing requires the use of a D4 PU fully external glue for edge sealing and for bonding to joists or engineered I beams and must be ordered with the boards to ensure full product compliance.

Please refer to the fixing datasheet for further information

| STEICO *weatherprotect* TECHNICAL VALUES

Baseboard conforms to	EN 312
Edge profile	tongue & groove two or four edges
Board density [kg / m ³]	ca. 685
Formaldehyde class E1	8 mb / 100 g
Raw material	wood fibre, resin, hardener, wax, Acrylic coating

STEICO *weatherprotect* boards are part of a complete flooring system comprising the following:

- D4 adhesive for bonding the T&G joints and to the floor joists.
- Weatherdek tape with applicator for sealing perimeter edges

Please refer to the fixing guide for further information.

