



Form Flex Expansion Joint



APPLICATION

- Parking Lots, Patios, Sidewalks
- Tunnels, Bridges, and Columns
- Airport Runways, and Highways
- Pavements, Curbs, and gutters
- Isolation Joints, Warehouse Flooring

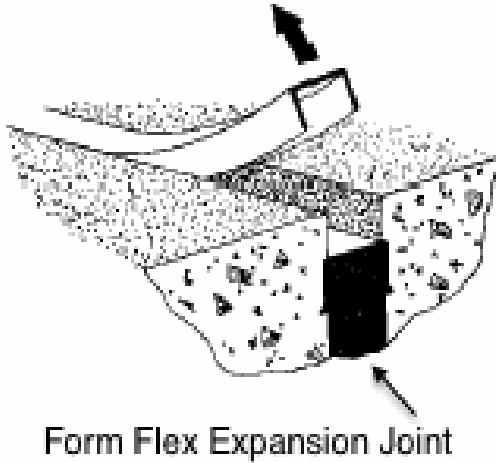

Available Sizes

Thickness: 1/4", 3/8", 1/2", 3/4", 1"

Sheet Size: 44" & 48" x 60" and 44" & 48" x 120"

Strips Size: 2", 3", 3.5", 4", 4.5", 5", 5.5", 6", 8", 12", 14", 16", 18"

<u>Test Results</u>	Compression	Weight Loss After Compression	Extrusion	Recovery	Density	Water Absorption	Asphalt Content
<u>Standard</u>	100psi min 750 psi max	3% max.	0.25in max.	70% min.	18 lb/ft3 min.	8% min 14% max.	35% Min.
<u>Measured</u>	355psi	<0.01%	.016in	82.5%	18.8lb/ft3	12.5%	40.1%



P.O. Box 413 Grasonville, MD 21638
Phone: 410-928-2009 Fax: 410-827-0624